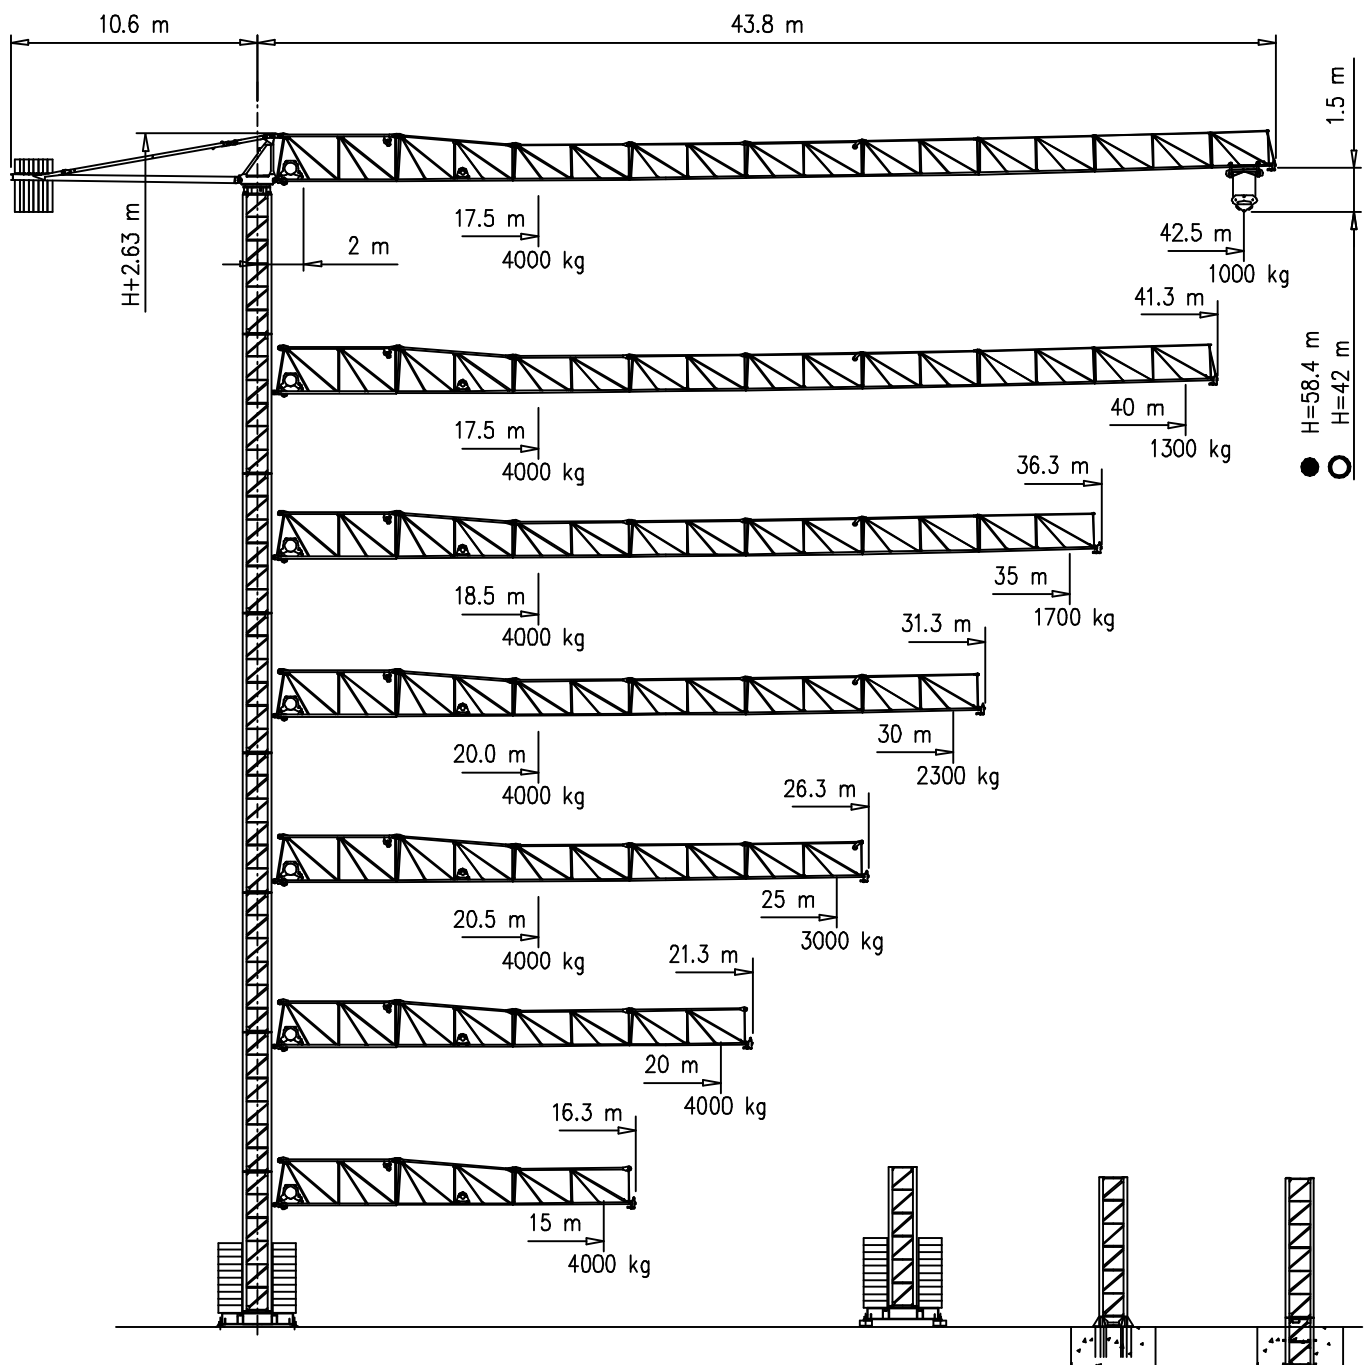
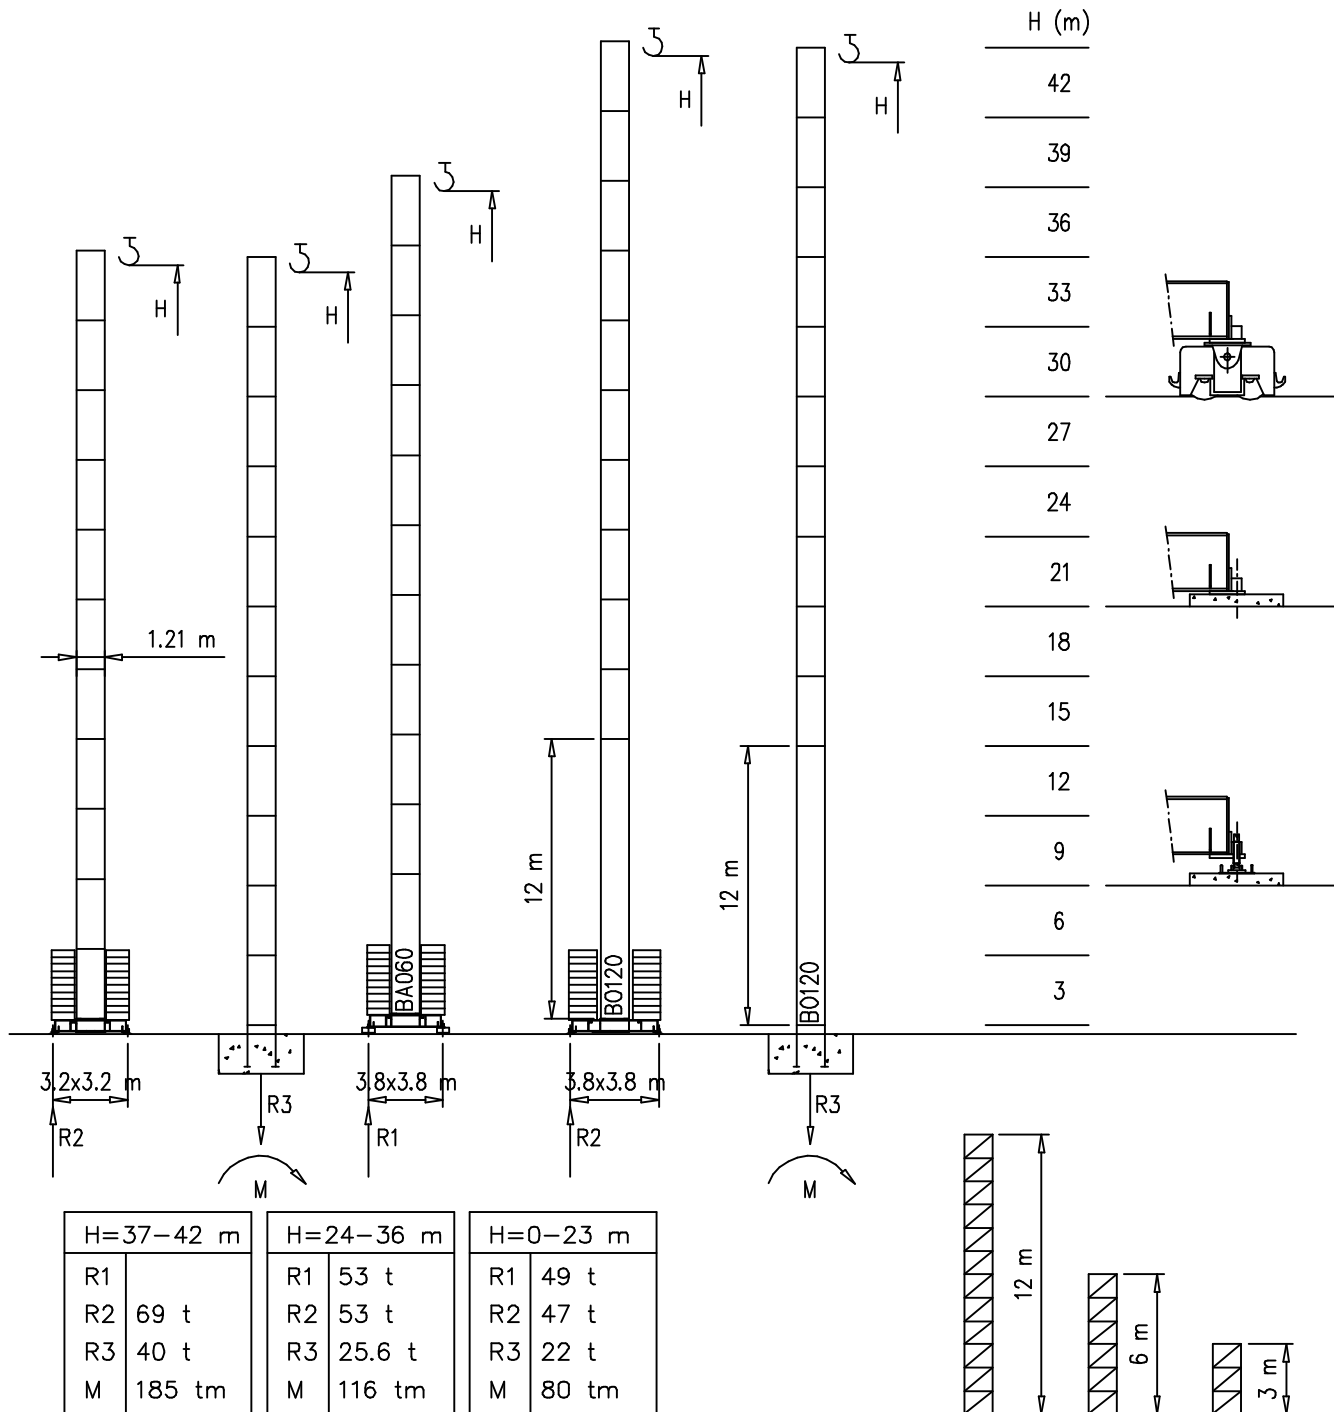





- S1210 – 1.21x1.21 m
- S1700 – 1.70x1.70 m

S1210

15 m → 42.5 m




Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre




H	n°	Tot.
0-18 m	12 A-B	36000 kg
19-36 m	18 A-B	54000 kg
37-42 m	24 B	72000 kg

	A	B
L	3.6m	4.0m
k	0.3m	1.2m
d	1.15m	0.19m




S1700

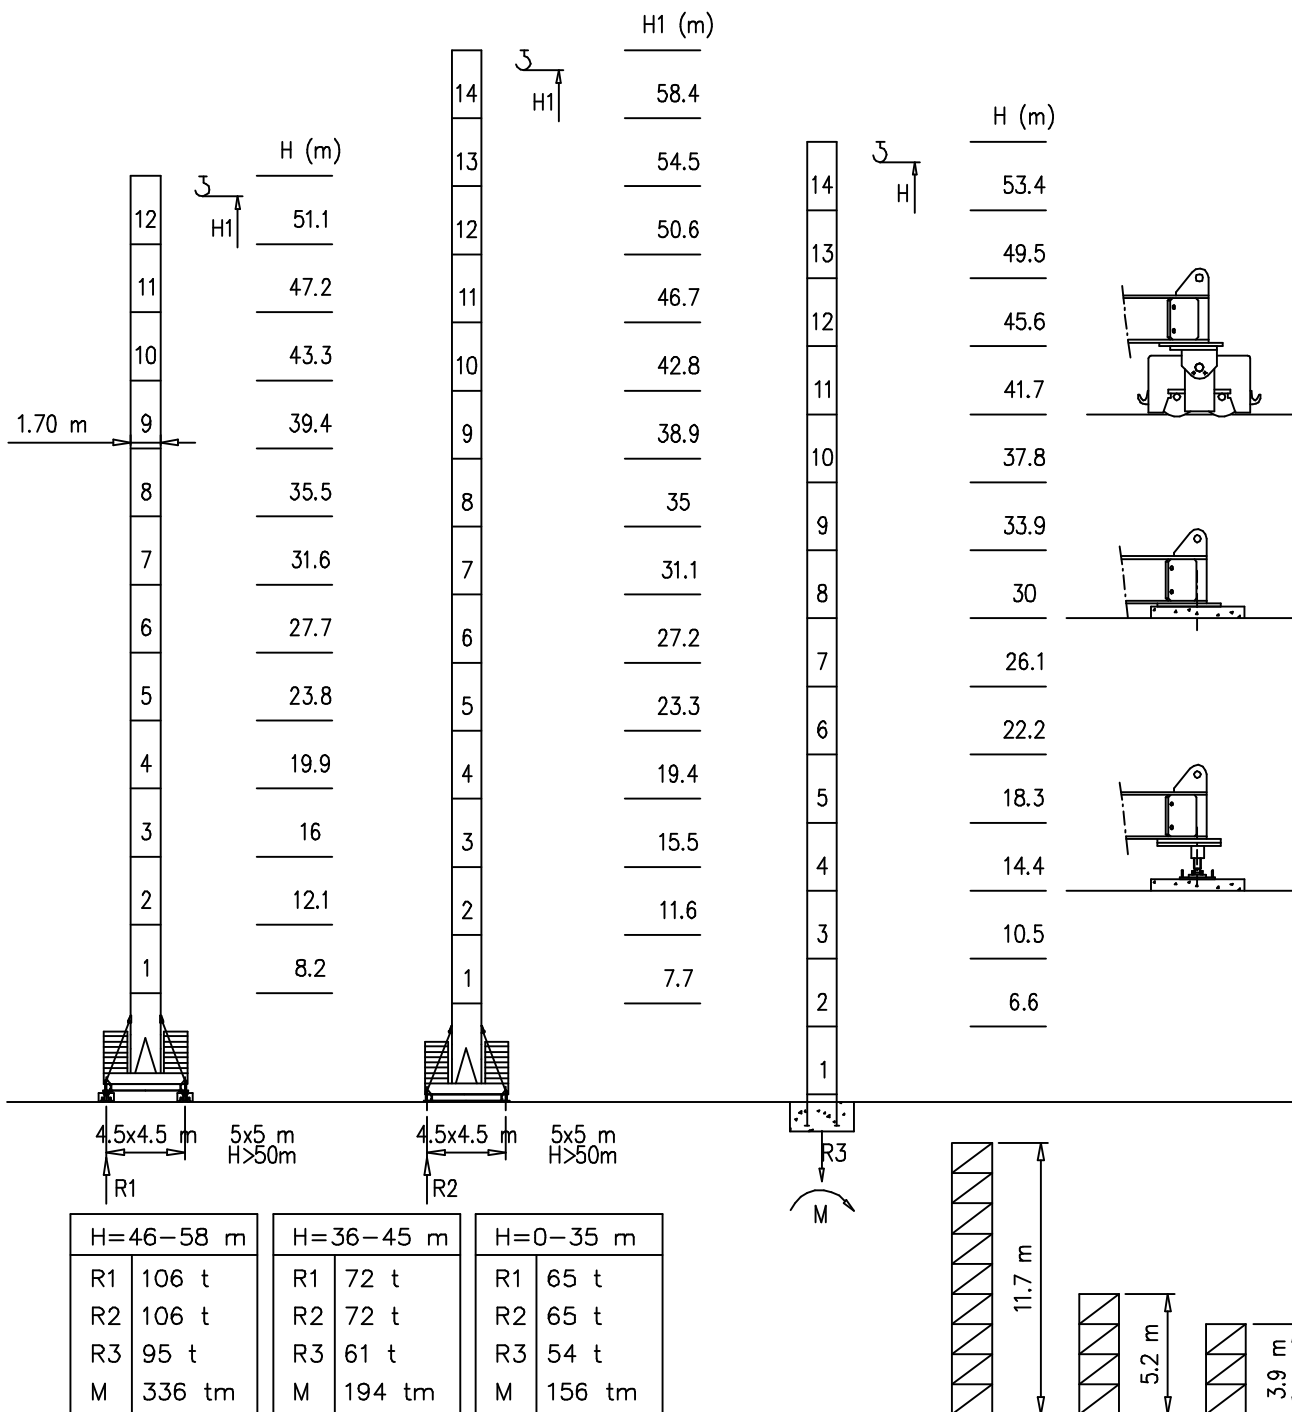
15 m → 42.5 m



Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre









H	n°	Tot.
0-35 m	2C+ 18D	60800 kg
36-45 m	2C+ 22D	72000 kg
46-58 m	2C+ 32D	105000 kg

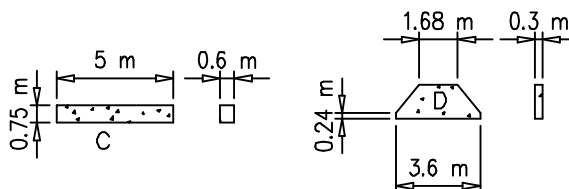

1340 TLX

Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas













P_{max} 2500 kg

	9600 kg		2	25.5	27.5	30	32.5	35	37.5	40	m	42.5	m
		40/42.5 m	2500	2500	2120	1900	1720	1560	1420	1300	kg	1000	kg
	9600 kg		2	27.5	30	32.5	35	m					
		35 m	2500	2500	2070	1870	1700	kg					
	9600 kg		2	29	30	m							
		30 m	2500	2500	2300	kg							
	8400 kg		2	25	m								
		25 m	2500	2500	kg								
	7200 kg		2	20	m								
		20 m	2500	2500	kg								
	4800 kg		2	15	m								
		15 m	2500	2500	kg								

P_{max} 3000 kg

	9600 kg		2	22	22.5	25	27.5	30	32.5	35	37.5	40	m	42.5	m
		40/42.5 m	2500	3000	2700	2380	2120	1900	1720	1560	1420	1300	kg	1000	kg
	9600 kg		2	23.5	25	27.5	30	32.5	35	m					
		35 m	2500	3000	2580	2300	2070	1870	1700	kg					
	9600 kg		2	25.5	27.5	30	m								
		30 m	2500	3000	2550	2300	kg								
	8400 kg		2	25	m										
		25 m	2500	3000	kg										
	7200 kg		2	20	m										
		20 m	2500	3000	kg										
	4800 kg		2	15	m										
		15 m	2500	3000	kg										




P_{max} 4000/2000 kg

	9600 kg		2	17.5	20	22.5	25	27.5	30	32.5	35	37.5	40	m	42.5	m
			2500	4000	3100	2700	2380	2120	1900	1720	1560	1420	1300	kg	1000	kg
	9600 kg		2	18.5	20	22.5	25	27.5	30	32.5	35	m				
			2500	4000	3350	2920	2580	2300	2070	1870	1700	kg				
	9600 kg		2	20				22.5	25	27.5	30	m				
			2500	4000				3230	2860	2550	2300	kg				
	8400 kg		2	20.5		22.5	25	m								
			2500	4000		3390	3000	kg								
	7200 kg		2	20				m								
			2500	4000				kg								
	4800 kg		2	15	m											
			2500	4000	kg											

X (m)	kg
3,2x3,2	2300kg
3,8x3,8	4500kg
4,5x4,5	3800kg

S1210	
(m)	(kg)
3	610
6	1500
12	2500

S1700	
(m)	(kg)
3,9	1600
5,2	2100
11,7	4200

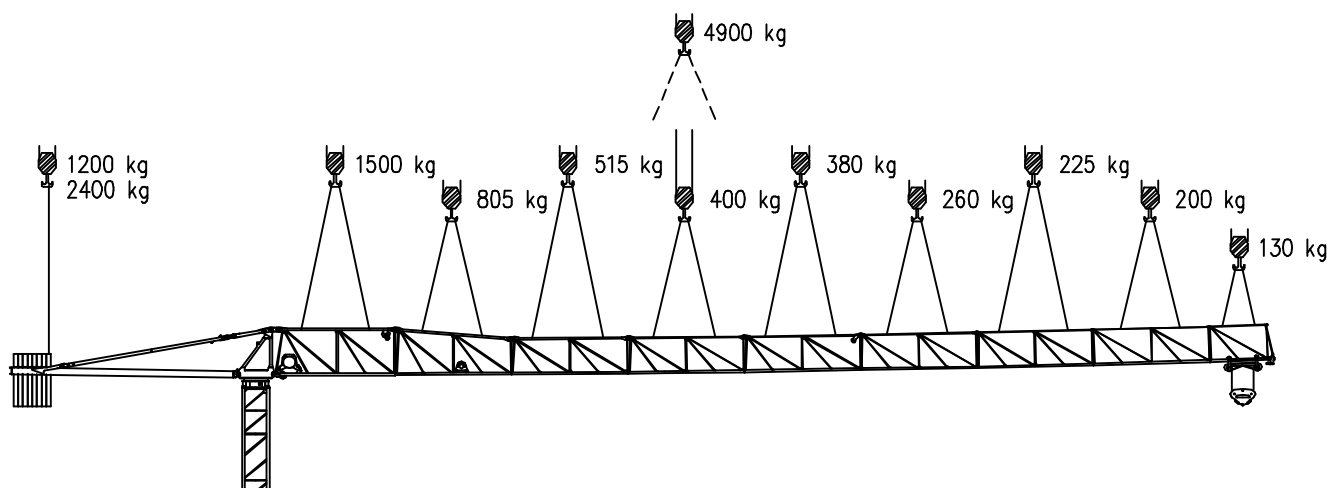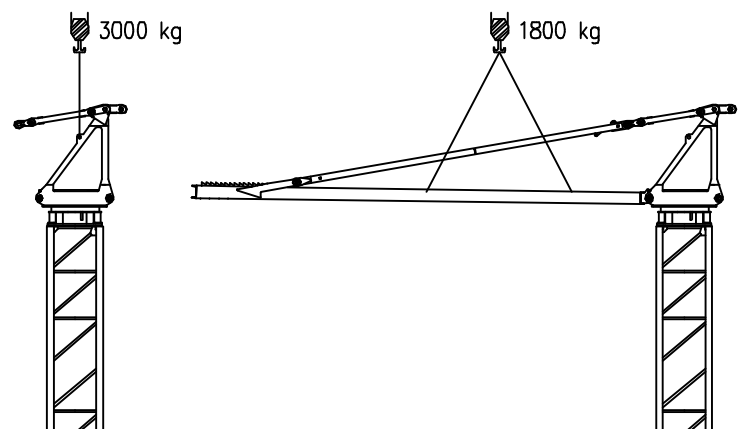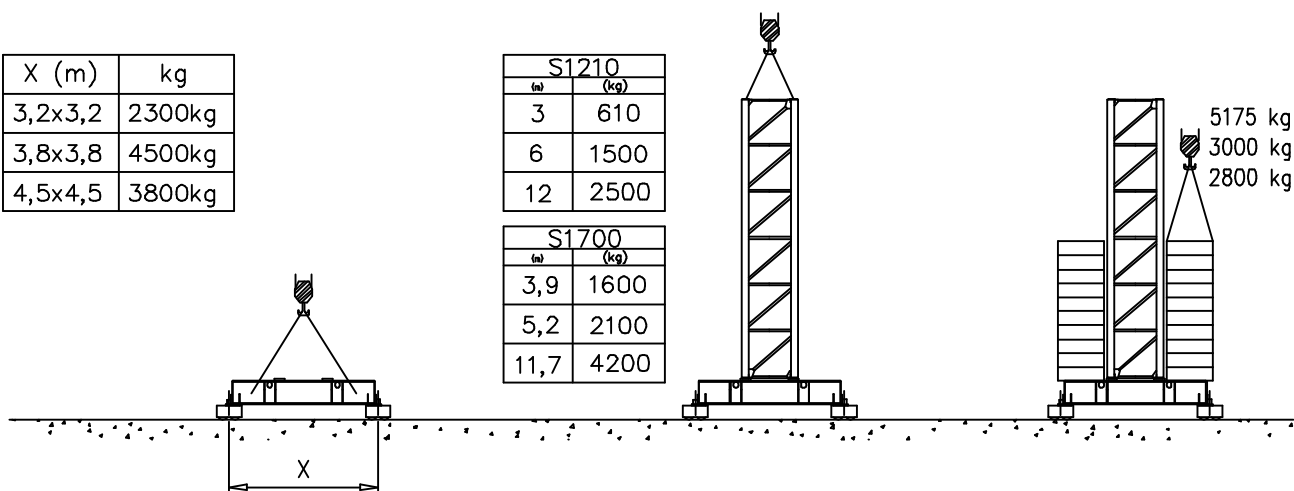

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos

Sollevamento S15.40 e V15.40 Hoisting Levage Heben Elevaciòn Elevação			1a	4 m/min	2500 kg	11 kW	S15.40				
Sollevamento S20.60 e V20.60 Hoisting Levage Heben Elevaciòn Elevação			2a	20 m/min	2500 kg		22 kVA				
			3a	40 m/min	1200 kg		V15.40				
		Sollevamento S20.40 e V20.40 Hoisting Levage Heben Elevaciòn Elevação	1a	7 m/min	2500 kg	S20.60					
2a			28 m/min	2500 kg	28 kVA						
3a			56 m/min	1200 kg	V20.60						
Sollevamento S25.60 e V25.60 Hoisting Levage Heben Elevaciòn Elevação			1a	4 m/min	3000 kg	14.7 kW	S20.40				
			2a	20 m/min	3000 kg		28 kVA				
			3a	40 m/min	1500 kg		V20.40				
Sollevamento S15.40 e V15.40 Hoisting Levage Heben Elevaciòn Elevação				1a	7 m/min	3000 kg	18.5 kW	S25.60			
				2a	28 m/min	3000 kg		34 kVA			
				3a	56 m/min	1500 kg		V25.60			
			1a	4 m/min	2000 kg	11 kW	S15.40 22 kVA				
			2a	20 m/min	2000 kg			V15.40 20 kVA			
			3a	40 m/min	1200 kg						
Sollevamento S20.60 e V20.60 Hoisting Levage Heben Elevaciòn Elevação			1a	2 m/min	4000 kg	14.7 kW	S20.60 28 kVA				
			2a	10 m/min	4000 kg			V20.60 24 kVA			
			3a	20 m/min	2400 kg						
			1a	7 m/min	2000 kg				14.7 kW	S20.60 28 kVA	
			2a	28 m/min	2000 kg						V20.60 24 kVA
			3a	56 m/min	1200 kg						
Carrello Trolleying Distribution Katzfahren Distribución Distribuição			1a	3.5 m/min	4000 kg	2.2 kW	Potenza elettrica necessaria Puissance électrique nécessaire Necessary electric power Anschlusswert – Potencia				
			2a	14 m/min	4000 kg						
			3a	28 m/min	2400 kg						
Rotazione Slewing Orientation Schwenken Orientación Rotação			1a	5 m/min	4000 kg	2.2 kW					
			2a	25 m/min	4000 kg						
			3a	50 m/min	2000 kg						
Traslazione Travelling Translation Kranfahren Traslación Translação			1a	0 → 0.2	giri/min tr/min rp/min	2.2 kW @ 1200rpm					
			2a	0 → 0.6							
			3a	0 → 0.9							
			1a	0 → 10	m/min	3.7 kW					
			2a	0 → 20							

Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica 400V – 50 Hz


FMgru s.r.l.
 via Emilia 11–29010 Pontenure PC ITALY
 tel. 0523/510446 ric.aut. fax 0523/510365
 www.fmgru.com e-mail: info@fmgru.com

FEM 1.001
2000/14/CE



Documento commerciale non contrattuale
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

This commercial document is not legally
binding. For any technical information, please
refer to the corresponding instructions.

Documento comercial no contractual
Para cualquier información técnica,
ver la noticia correspondiente.

Code: 15ICA37T20AD			
Ed.	Data	Rev	Data
1	15.04.04	1	12.04.05