



- S1700 – 1.70x1.70 m
- S2050 – 2.05x2.05 m


Torre/Reazioni - Masts/Reactions - Mat/Réactions - Maste/Eckdrücke - Mástil/Reacciones - Tramo/Reacções

S1700



 20 m \rightarrow 65 m

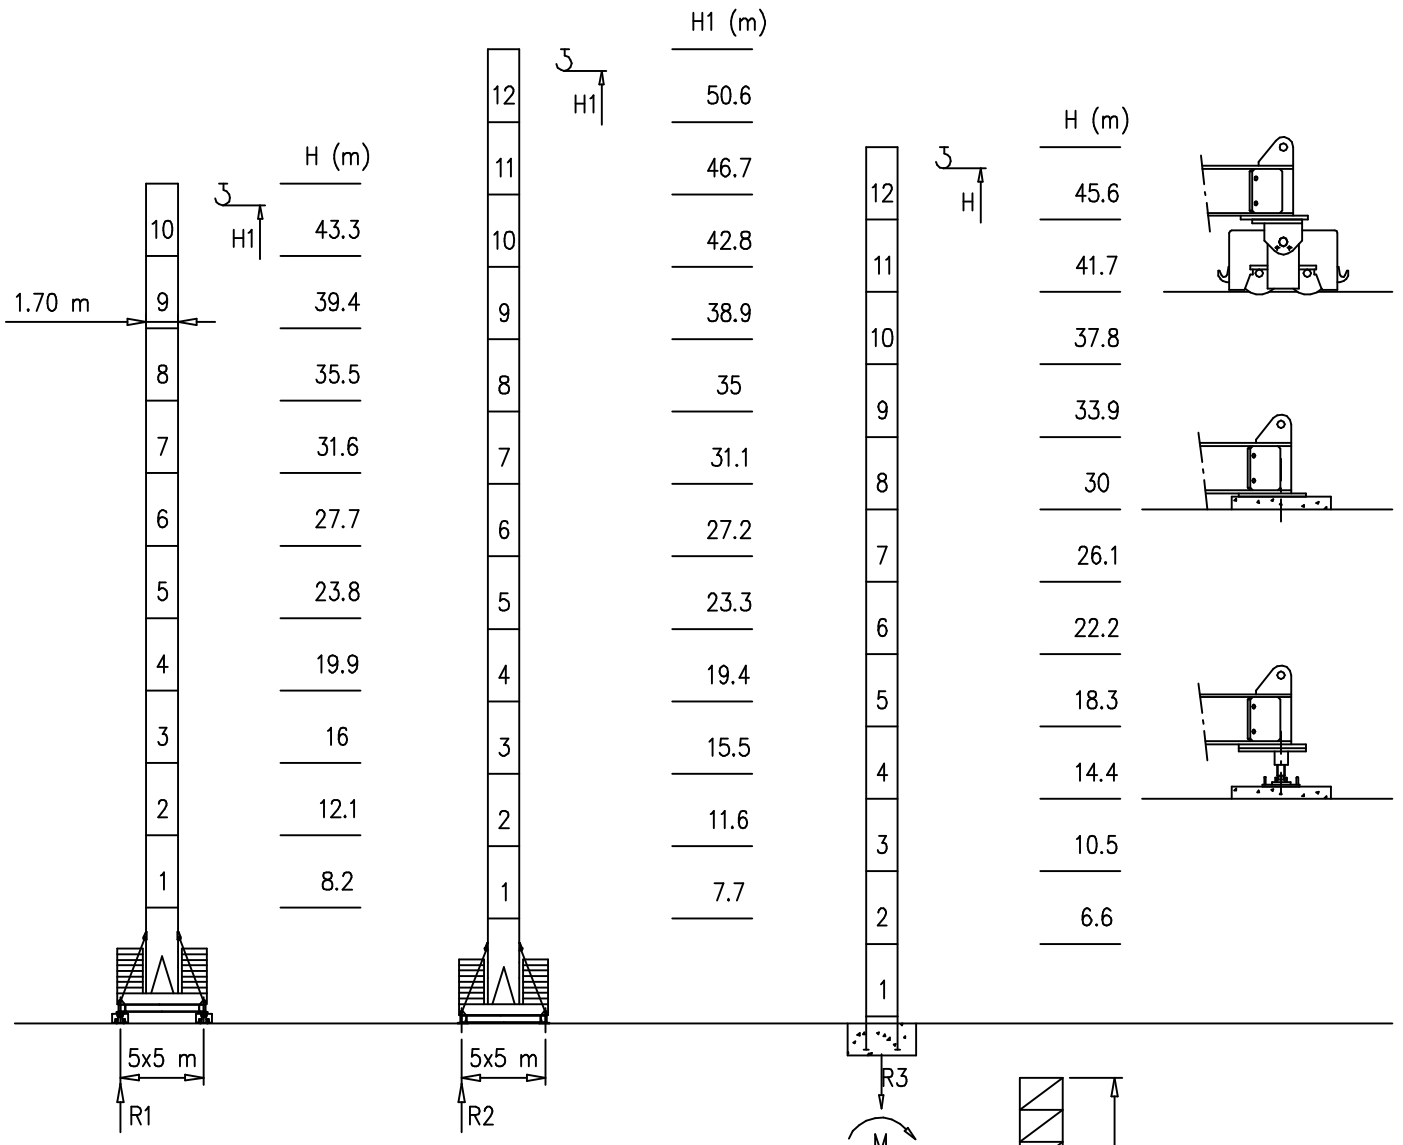

H=38-51 m		H=0-37 m	
R1	106 t	R1	89 t
R2	106 t	R2	88 t
R3	95 t	R3	74 t
M	336 tm	M	194 tm

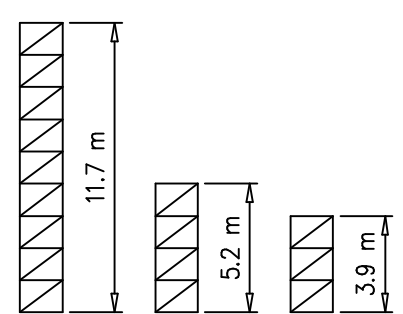




Peso zavorra - Ballast weight - Poids du lest - Ballastgewicht - Peso de lastre

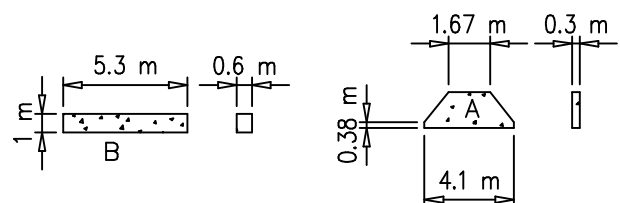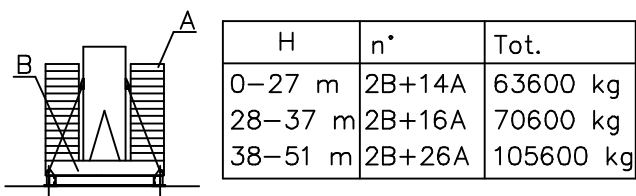


Torre/Reazioni – Masts/Reactions – Mat/Réactions – Maste/Eckdrücke – Mástil/Reacciones – Tramo/Reações

S2050


 20 m \rightarrow 65 m

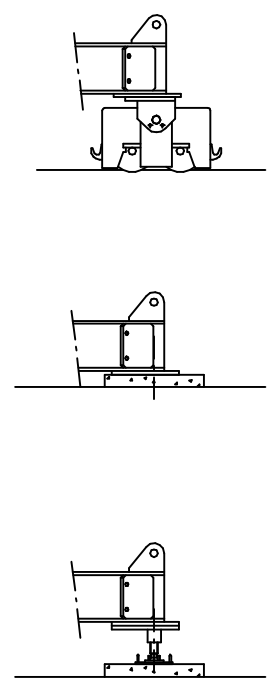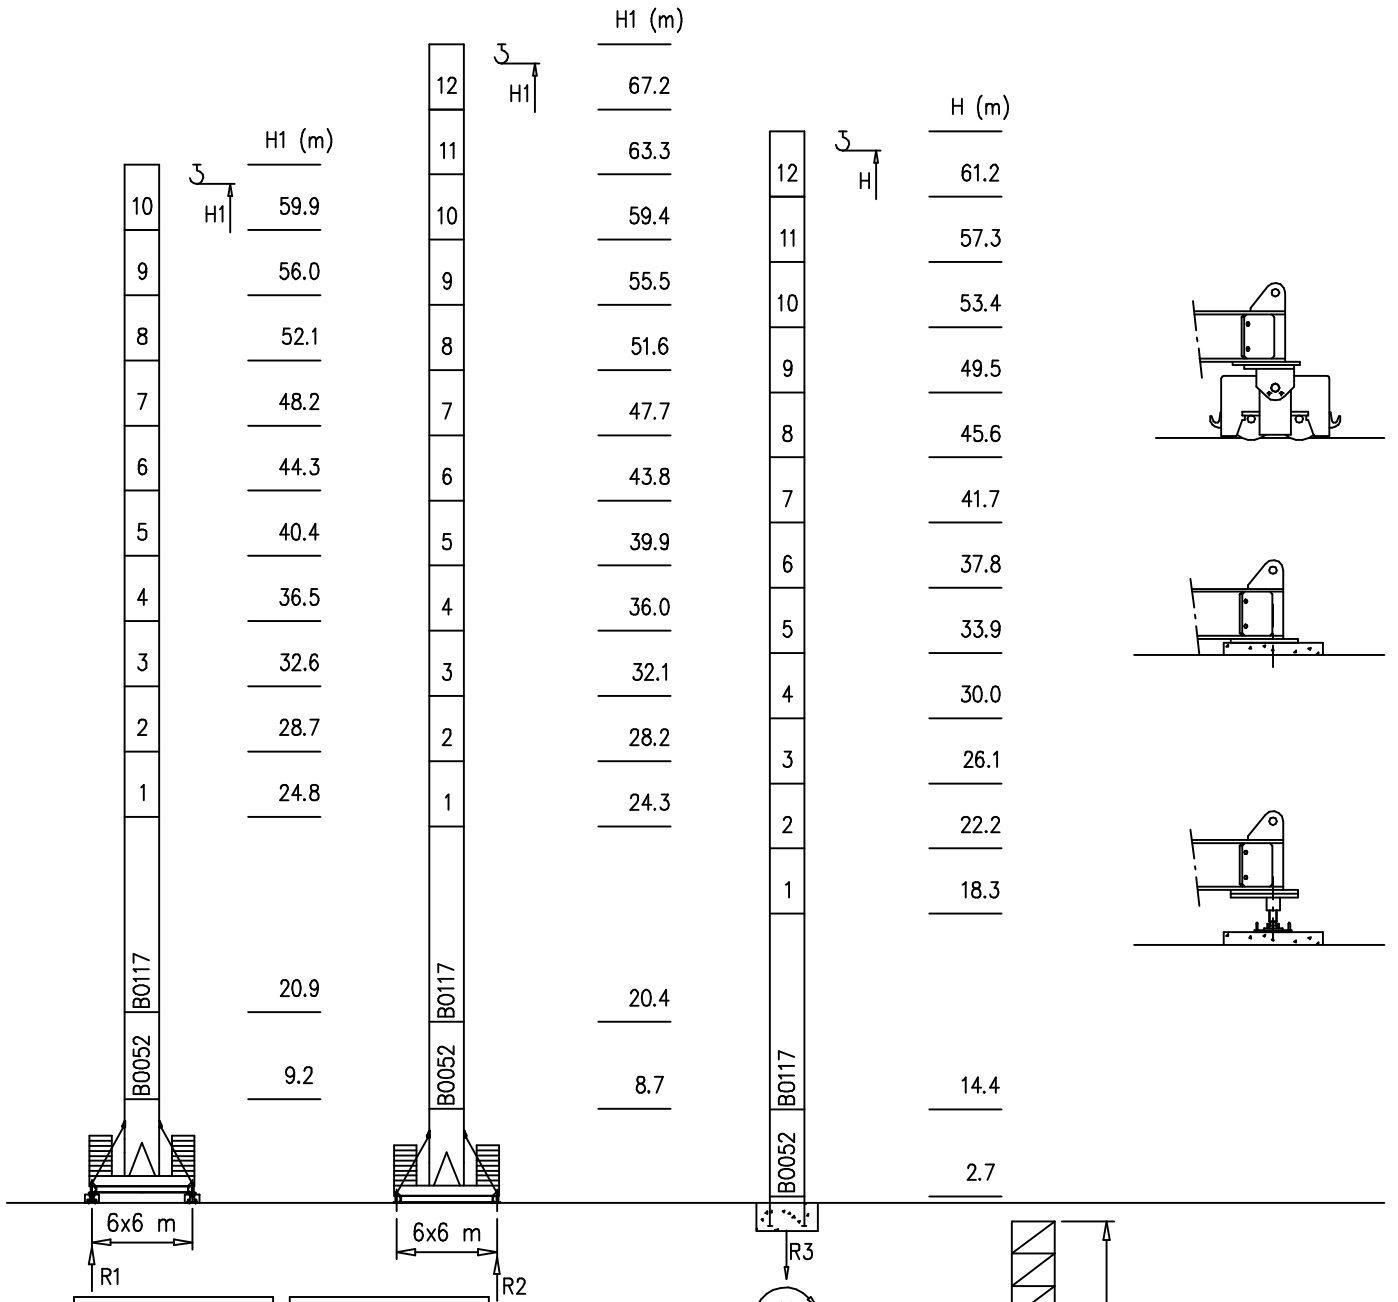


H=46–58 m		H=0–45 m	
R1	90 t	R1	89 t
R2	90 t	R2	88 t
R3	91 t	R3	63 t
M	341 tm	M	185 tm

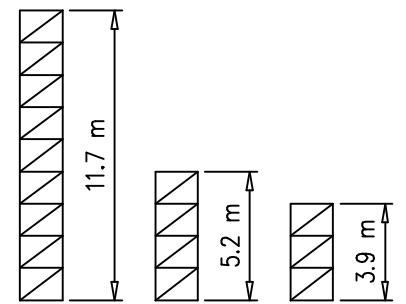

Peso zavorra – Ballast weight – Poids du lest – Ballastgewicht – Peso de lastre



















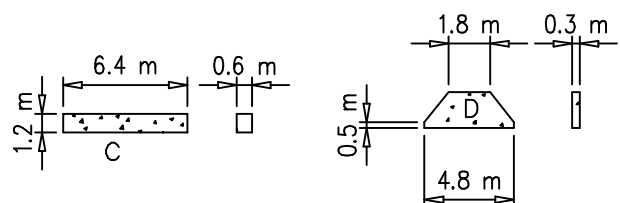



H	n°	Tot.
0–55 m	2C+ 16D	102320 kg
56–67 m	2C+ 18D	112460 kg























Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas

Pmax 3000 kg

	20400 kg		2.5												36.6	40	45	50	55	60	65	m
			3000												3000	2410	2090	1830	1620	1450	1300	kg
	19200 kg		2.5												37.5	40	45	50	55	60	m	
			3000												3000	2780	2160	1890	1680	1500	kg	
	19200 kg		2.5												39.7	40	45	50	55	m		
			3000												3000	2970	2310	2030	1800	kg		
	18000 kg		2.5												42.4	45	50	m				
			3000												3000	2500	2200	kg				
	16800 kg		2.5												41.8	45	m					
			3000												3000	2750	kg					
	15600 kg		2.5												40	m						
			3000												3000	kg						
	14400 kg		2.5												35	m						
			3000												3000	kg						
	13200 kg		2.5												30	m						
			3000												3000	kg						
	10800 kg		2.5												25	m						
			3000												3000	kg						
	7200 kg		2.5												20	m						
			3000												3000	kg						



Pmax 6000/3000 kg

	20400 kg		2.5	19.7	20	25	30	35	36.6	40	45	50	55	60	65	m
			6000	6000	5910	4620	3770	3160	3000	2410	2090	1830	1620	1450	1300	kg
	19200 kg		2.5	20.2	25	30	35	37.5	40	45	50	55	60	m		
			6000	6000	4750	3880	3250	3000	2780	2160	1890	1680	1500	kg		
	19200 kg		2.5	21.4	25	30	35	39.7	40	45	50	55	m			
			6000	6000	5060	4130	3470	3000	2970	2310	2030	1800	kg			
	18000 kg		2.5	23	25	30	35	40	42.4	45	50	m				
			6000	6000	5450	4450	3750	3210	3000	2500	2200	kg				
	16800 kg		2.5	22.5	25	30	35	40	41.8	45	m					
			6000	6000	5350	4380	3680	3160	3000	2750	kg					
	15600 kg		2.5	24	25	30	35	40	m							
			6000	6000	5740	4700	3960	3400	kg							
	14400 kg		2.5	24.2	25	30	35	m								
			6000	6000	5800	4750	4000	kg								
	13200 kg		2.5	26.8	30	m										
			6000	6000	5300	kg										
	10800 kg		2.5	25	m											
			6000	6000	kg											
	7200 kg		2.5	20	m											
			6000	6000	kg											
















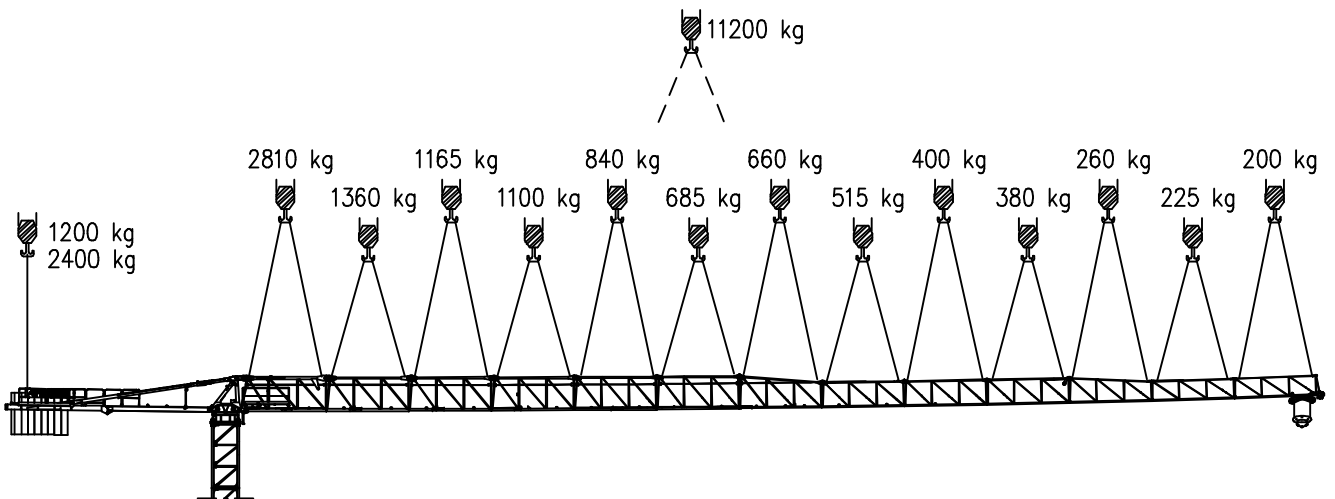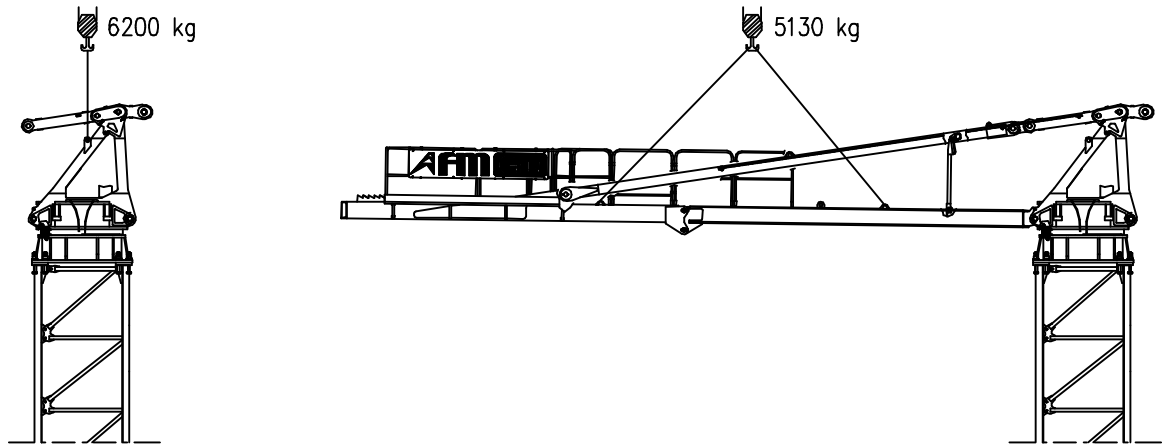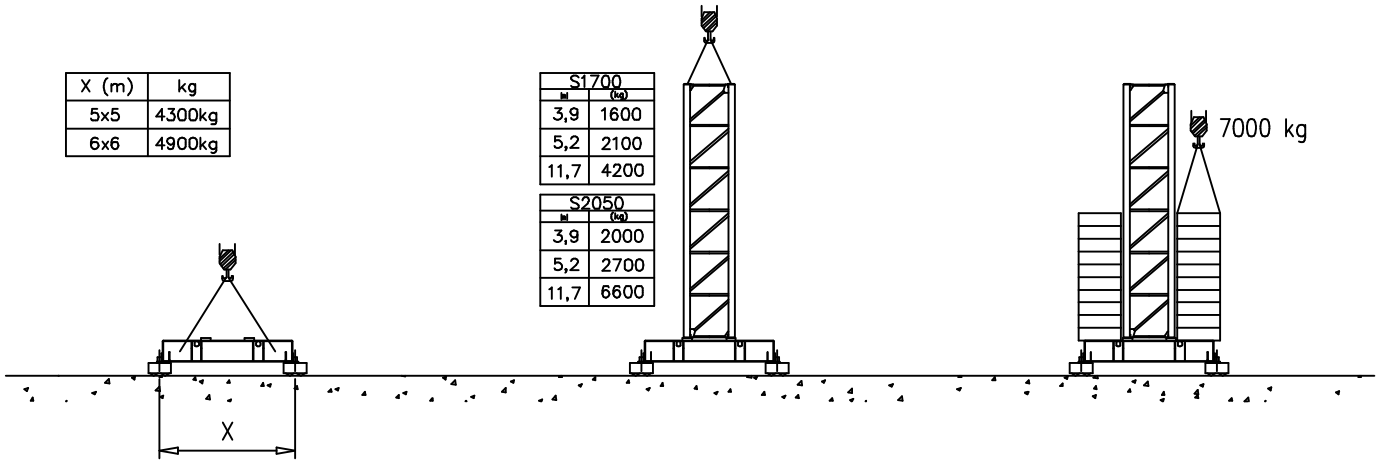

Montaggio – Montage – Erection – Montage – Montaje – Montagem

X (m)	kg
5x5	4300kg
6x6	4900kg

S1700	
m	(kg)
3,9	1600
5,2	2100
11,7	4200

S2050	
m	(kg)
3,9	2000
5,2	2700
11,7	6600



Sollevamento V25.60 Hoisting Levage Heben Elevaciòn Elevaçao			1a	7 m/min	3000 kg	18.5 kW	V25.60 37 kVA
			2a	18 m/min	3000 kg		
			3a	28 m/min	3000 kg		
			4a	42 m/min	2250 kg		
			5a	56 m/min	1500 kg		
			1a	3.5 m/min	6000 kg		
			2a	9 m/min	6000 kg		
			3a	14 m/min	6000 kg		
			4a	21 m/min	4500 kg		
			5a	28 m/min	3000 kg		
Sollevamento V33.90 Hoisting Levage Heben Elevaciòn Elevaçao			1a	3 m/min	3000 kg	22 kW	V33.90 47 kVA
			2a	18 m/min	3000 kg		
			3a	34 m/min	3000 kg		
			4a	54 m/min	1800 kg		
			5a	70 m/min	1300 kg		
			6a	90 m/min	500 kg		
			1a	1.5 m/min	6000 kg		
			2a	9 m/min	6000 kg		
			3a	17 m/min	6000 kg		
			4a	27 m/min	3600 kg		
			5a	35 m/min	2600 kg		
			6a	45 m/min	1000 kg		
Carrello Trolleying Distribution Katzfahren Distribuciòn Distribuiçao			1a	OP 5 m/min	6000 kg	3 kW	Potenza elettrica necessaria Puissance électrique nécessaire Necessary electric power Anschlusswert – Potencia
			2a	25 m/min	6000 kg		
			3a	50 m/min	3000 kg		
Rotazione Slewing Orientation Schwenken Orientaciòn Rotaçao			1a	0 → 0.2	giri/min tr/min rp/min	4.4 kW @ 1200rpm n° 2 x 2.2 kW	
			2a	0 → 0.6			
			3a	0 → 0.9			
Traslazione Travelling Translation Kranfahren Traslaciòn Traslaçao			1a	OP 0 → 5		3.7 kW	
			2a	0 → 20			

Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica 400V – 50 Hz

AFM Gru FMgru s.r.l.
via Emilia 11-29010 Pontenure PC ITALY
tel. 0523/510446 ric.aut. fax 0523/510365
www.fmgru.com e-mail: info@fmgru.com

FEM 1.001
2000/14/CE



Documento commerciale non contrattuale
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

This commercial document is not legally
binding. For any technical information, please
refer to the corresponding instructions.

Documento comercial no contractual
Para cualquier información técnica,
ver la noticia correspondiente.

Code: 15/CA37T45A0			
Ed.	Data	Rev	Data
1	10.01.07	0	10.01.07