





GRD 52

Gru da città senza cuspidi
Top less city crane
City kran ohne turmspitze
City grue sans poinçon

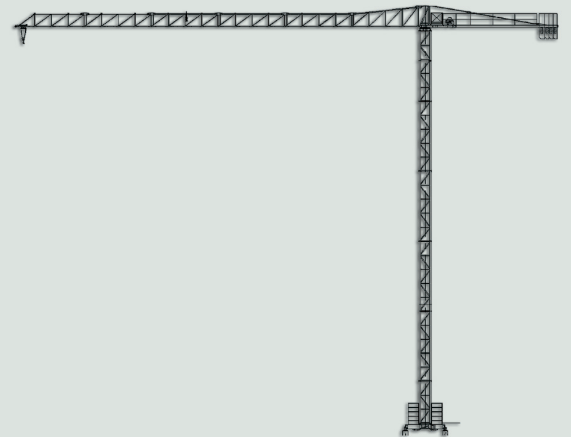

RDLIFT

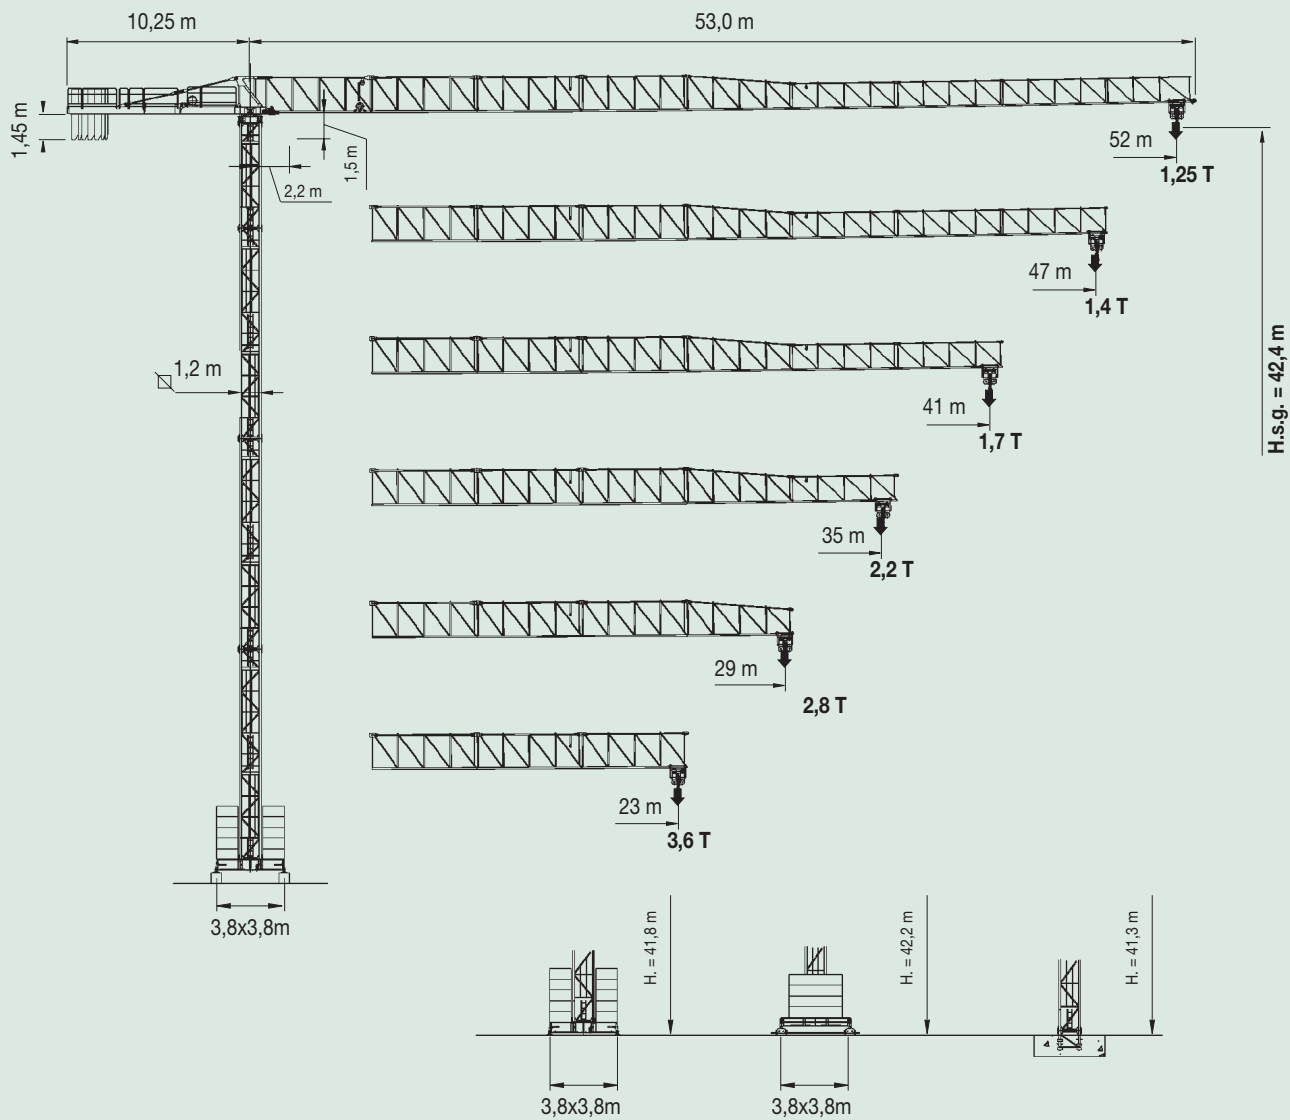

GRD 52

Gru da città senza cuspid




Top less city crane

City kran ohne turmspitze




City grue sans poincon



Raggi e portate - Radius and s.w.l.

Portata max / Max s.w.l. 		2500 kg. 						5000 kg. 						
Braccio / Jib (m.)		52	47	41	35	29	23	52	47	41	35	29	23	
Campo di portata max Max s.w.l. range		28,08	28,01	28,99	31,17	29	23	14,7	14,6	15,1	16,2	17,3	17,1	
Raggi (m.)	15	2500	2500	2500	2500	2500	2500	4876	4863	5000	5000	5000	5000	
	16	2500	2500	2500	2500	2500	2500	4535	4523	4696	5000	5000	5000	
	17	2500	2500	2500	2500	2500	2500	4237	4225	4388	4750	5000	5000	
	18	2500	2500	2500	2500	2500	2500	3973	3963	4115	4456	4775	4732	
	19	2500	2500	2500	2500	2500	2500	3739	3729	3873	4195	4496	4455	
	20	2500	2500	2500	2500	2500	2500	3529	3519	3656	3961	4247	4208	
	21	2500	2500	2500	2500	2500	2500	3340	3331	3461	3751	4022	3985	
	22	2500	2500	2500	2500	2500	2500	3169	3160	3284	3560	3818	3783	
	Radius (m.)	23	2500	2500	2500	2500	2500	2500	3013	3005	3123	3387	3633	3600
		24	2500	2500	2500	2500	2500		2871	2863	2976	3229	3465	
		25	2500	2500	2500	2500	2500		2741	2733	2841	3083	3310	
		26	2500	2500	2500	2500	2500		2621	2614	2718	2950	3167	
		27	2500	2500	2500	2500	2500		2510	2503	2603	2826	3035	
		28	2500	2500	2500	2500	2500		2408	2401	2497	2712	2913	
		29	2412	2406	2499	2500	2500		2312	2306	2399	2606	2800	
		30	2324	2317	2407	2500			2224	2217	2307	2507		
		31	2241	2235	2321	2500			2141	2135	2221	2415		
		32	2163	2157	2241	2429			2063	2057	2141	2329		
		33	2090	2085	2166	2348			1990	1985	2066	2248		
		34	2022	2017	2095	2272			1922	1917	1995	2172		
	35	1958	1952	2029	2200			1858	1852	1929	2100			
	36	1897	1892	1966				1797	1792	1866				
	37	1840	1835	1907				1740	1735	1807				
	38	1786	1781	1851				1686	1681	1751				
	39	1735	1730	1798				1635	1630	1698				
	40	1686	1681	1748				1586	1581	1648				
	41	1640	1635	1700				1540	1535	1600				
	42	1595	1591					1495	1491					
	43	1554	1549					1454	1449					
	44	1514	1509					1414	1409					
	45	1475	1471					1375	1371					
	46	1439	1435					1339	1335					
	47	1404	1400					1304	1300					
	48	1371						1271						
	49	1339						1239						
	50	1308						1208						
	51	1278						1178						
	52	1250						1150						

Raggi e portate - Radius and s.w.l.

Portata max / Max s.w.l. 		3000 kg. 						6000 kg. 					
Braccio / Jib (m.)		52	47	41	35	29	23	52	47	41	35	29	23
Campo di portata max Max s.w.l. range		23,79	23,73	24,56	26,39	28,11	23	12,47	12,44	12,86	13,79	14,66	14,58
Raggi (m.) Radius (m.)	12	3000	3000	3000	3000	3000	3000	6000	6000	6000	6000	6000	6000
	13	3000	3000	3000	3000	3000	3000	5727	5712	5927	6000	6000	6000
	14	3000	3000	3000	3000	3000	3000	5269	5255	5454	5899	6000	6000
	15	3000	3000	3000	3000	3000	3000	4876	4863	5048	5462	5848	5811
	16	3000	3000	3000	3000	3000	3000	4535	4523	4696	5082	5443	5406
	17	3000	3000	3000	3000	3000	3000	4237	4225	4388	4750	5088	5051
	18	3000	3000	3000	3000	3000	3000	3973	3963	4115	4456	4775	4738
	19	3000	3000	3000	3000	3000	3000	3739	3729	3873	4195	4496	4460
	20	3000	3000	3000	3000	3000	3000	3529	3519	3656	3961	4247	4211
	21	3000	3000	3000	3000	3000	3000	3340	3331	3461	3751	4022	3987
	22	3000	3000	3000	3000	3000	3000	3169	3160	3284	3560	3818	3784
	23	3000	3000	3000	3000	3000	3000	3013	3005	3123	3387	3633	3600
	24	2971	2963	3000	3000	3000		2871	2863	2976	3229	3465	
	25	2841	2833	2941	3000	3000		2741	2733	2841	3083	3310	
	26	2721	2714	2818	3000	3000		2621	2614	2718	2950	3167	
	27	2610	2603	2703	2926	3000		2510	2503	2603	2826	3035	
	28	2508	2501	2597	2812	3000		2408	2401	2497	2712	2913	
	29	2412	2406	2499	2706	2900		2312	2306	2399	2606	2800	
	30	2324	2317	2407	2607			2224	2217	2307	2507		
	31	2241	2235	2321	2515			2141	2135	2221	2415		
	32	2163	2157	2241	2429			2063	2057	2141	2329		
	33	2090	2085	2166	2348			1990	1985	2066	2248		
	34	2022	2017	2095	2272			1922	1917	1995	2172		
	35	1958	1952	2029	2200			1858	1852	1929	2100		
	36	1897	1892	1966				1797	1792	1866			
	37	1840	1835	1907				1740	1735	1807			
	38	1786	1781	1851				1686	1681	1751			
	39	1735	1730	1798				1635	1630	1698			
40	1686	1681	1748				1586	1581	1648				
41	1640	1635	1700				1540	1535	1600				
42	1595	1591					1495	1491					
43	1554	1549					1454	1449					
44	1514	1509					1414	1409					
45	1475	1471					1375	1371					
46	1439	1435					1339	1335					
47	1404	1400					1304	1300					
48	1371						1271						
49	1339						1239						
50	1308						1208						
51	1278						1178						
52	1250						1150						

Altezza sottogancio, zavorra di base, reazioni - H.U.H., max base ballast, corner pressure

Diagram 1			Diagram 2			Diagram 3			Diagram 4		
HuH (m)	Z (t)	F1 (t.)	HuH (m)	Z (t)	F1 (t.)	HuH (m)	Z (t)	F1 (t.)	HuH (m)	F2 (t.)	F3 (t.)
42,6	60	49	42,0	60	49	42,5	60	49	41,3	87	62
36,7	50	46	36,1	50	46	36,6	50	46	35,4	76	56
30,8	50	43	30,2	50	43	30,7	50	43	29,5	66	47
24,9	40	38	24,3	40	38	24,8	40	38	23,6	59	39
19,0	40	38	18,4	40	38	18,9	40	38	17,7	59	39
13,1	40	38	12,5	40	38	13,0	40	38	11,8	59	39

Caratteristiche azionamenti principali - General technical characteristics


Type	Cv	Kw	mt	speed	m/min	Kg	m/min	Kg
2,5 T	15	11	105	▲	5	2500		
				▲▲	20	2500		
				▲▲▲	40	1250		
3 T	25	18,4	105	▲	7,5	3000		
				▲▲	30	3000		
				▲▲▲	52	1750		
6 T	25	18,4	260	▲	7,5	2500	3,7	6000
				▲▲	30	2500	15	6000
				▲▲▲	60	1250	30	3000
3 T VF	25	18,4	105	▲	6	3000		
				▲▲	30	3000		
				▲▲▲	52	1750		
				▲▲▲▲	63	1400		
6 T VF	25	18,4	260	▲	6	3000	3	6000
				▲▲	30	3000	15	6000
				▲▲▲	60	1500	30	3000
				▲▲▲▲	72	1000	36	2000

Rotazione - Slewing	giri/min	Kw	cv	Carrello - Trolley	m/min	Kw	cv	Traslazione - Rail	m/min	Kw
▲	0,37			▲	15	1,1	1,5	▲	14	2x2,9
▲▲	0,70	5	6,8	▲▲	30	2,2	3	▲▲		
▲▲▲	1,00			▲▲▲	60	2,2	3	▲▲▲		





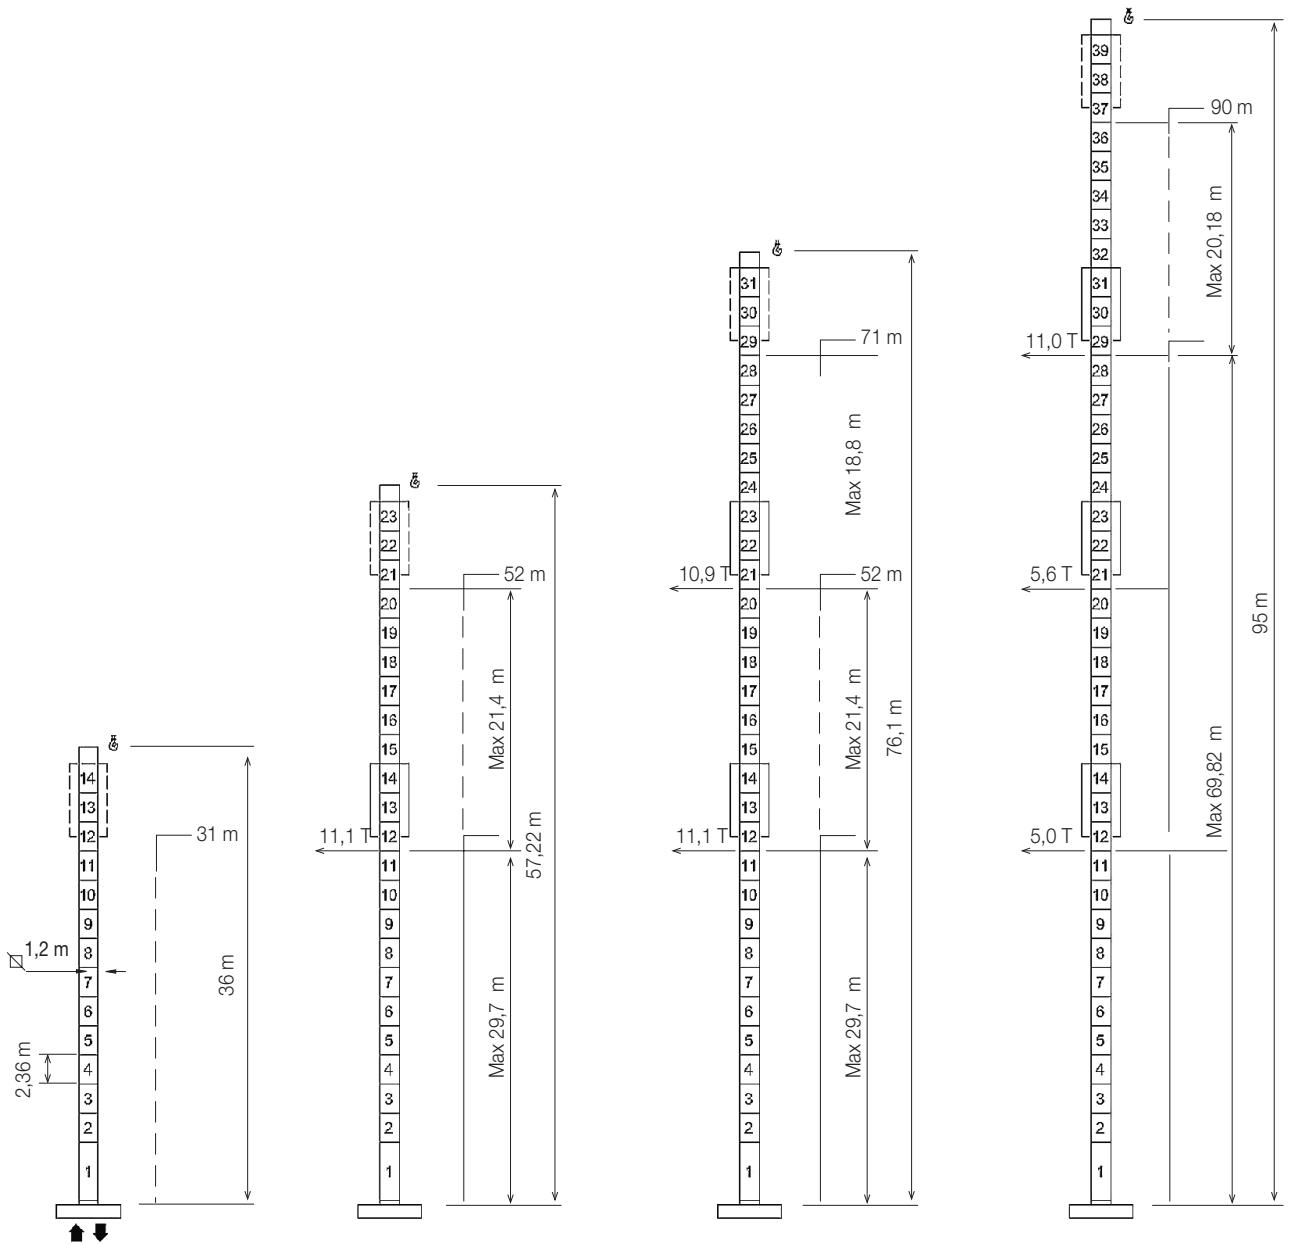

















Forza motrice totale - Total installed power

11 Kw (15Hp)	18,4 Kw (25Hp)
24 Kw	32 Kw

Gru a sorpalzo idraulico "HC" - External climbing



Lista dei pesi - Packing list

Pos. Item	Pezzi Pieces	Descrizione Description	Figura Draw	Dimensioni (m.) Dimensions			Peso (Kg) Weight		
				L	W	H	Unit.	Tot.	
1	1	Elemento di freccia Jib element	N°1 	6,135	1,280	2,060		1050	
	1		N°2 	6,155	1,150	2,060		700	
	1		N°3 	6,155	1,150	2,060		580	
	1		N°4 	6,155	1,150	2,060		490	
	1		N°5 	6,060	1,150	2,030		420	
	1		N°6 	6,060	1,150	1,500		330	
	1		N°7 	6,040	1,150	1,500		300	
	1		N°8 	6,005	1,150	1,500		265	
	1		N°9 	4,785	1,150	1,470		220	
Freccia - Jib				52m	52,300	1,280	2,200	5320	
				47m	47,600	1,280	2,200	5100	
				41m	41,700	1,280	2,200	4835	
				35m	35,800	1,280	2,200	4535	
				29m	29,900	1,280	2,200	4205	
				23m	24,000	1,280	2,200	3785	
2	1	Controfreccia girevole, argano sollevamento, quadro elettrico, cuspide. Counterjib tournable, hoisting winch, trolley jib, electrical bx, a frame.		5,085	1,700	2,650		5600	
	1	Elemento controfreccia esterno. External counterjib.		6,715	1,435	1,470		1700	
3	6	Blocchi di contrappeso. Counterweight block.		A125	3000	0,185	1,200	1250	7500
	4			B250	3000	0,370	1,200	2500	10000
4	1	Elemento di torre Tower element		11,800	1,200	1,380		3050	
	1			5,800	1,200	1,380		1610	
	1			2,950	1,200	1,380		810	
5	1	Trave principale di base. Base main beam.		5,530	0,670	0,640		1480	
	2	Semitrave di base. Half base beam.		5,530	0,670	0,640	740	1480	
6	2	Bilancino di traslazione folle Driven boige		0,800	0,195	0,385	190	380	
7	2	Bilancino di traslazione motoriz. Driving boige		0,950	0,425	0,385	310	820	
8	10	Blocco di zavorra Base ballast block (B30-12)		3,000	0,600	1,200	4950	49500	



RDLIFT

RDLIFT srl

Via Emilia San Pietro, 25
42100 Reggio Emilia - Italy

Tel. +39 0522 448511 - Fax +39 0522 448540
commerciale@rdlift.com

www.rdlift.com

Dati illustrativi non impegnativi
con riserva di modifica senza
preavviso.

Specifications and data not
binding subject to modification without
notice.

Angaben und Beschreibung
unverbindlich andreungen
vorbehalten ohne weitere mitteilung.

Données techniques seulement
indicatives modifications réservées
sans préavis

Agente - Dealer